

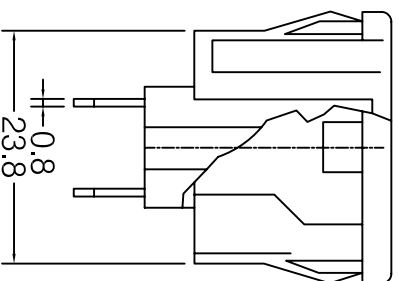


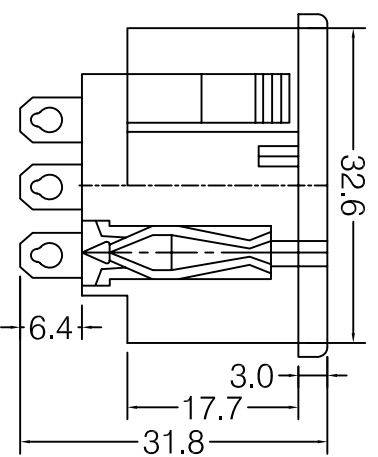

**THICKNESS:**  
 0.8-1.2t(X=25.00)  
 1.3-2.0t(X=25.20)  
 2.1-3.0t(X=25.4)

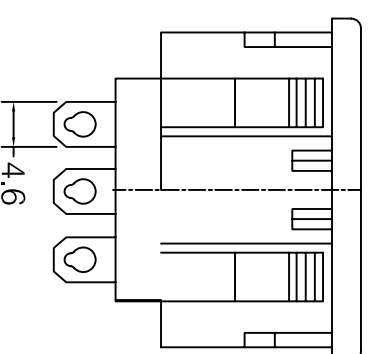

**SPECIFICATIONS**

- 1. RATING : 10A 250VAC
- 2. WITHSTAND VOLTAGE : AC 2000V 1Sec
- 3. INSULATION RESISTANCE : MORE THAN 100MΩ (at DC 500V)
- 4. SAFETY :  US

DIMENSIONS IN MILLIMETERS  
 3rd ANGLE PROJECTION  
 SCALE: N.T.S

DRAWN PYQ		MATERIAL: PA666/Ph BRONZE		TOLERANCES NO DECIMAL PLACE ± 0.5 1 DECIMAL PLACE ± 0.2 2 DECIMAL PLACES ± 0.1 DIAMETER HOLES ± 0.1 ANGLES ± 1/2 DEGREE (UNLESS OTHERWISE STATED)			
CHECKED PCS		FINISH: AS MOULDED/TIN PLATED		 <b>CHK</b>			
ISSUE 1		1st DRAWN				TITLE: IEC POWER OUTLET FOR SNAP-IN	
AMEND		DATE 19/07/16				DRWG NO: AC-1009	

